

EMC1600 Series

16-Bay Media Converter Chassis



Overview

EMC1600 is a metal-cased chassis system, it can house up to sixteen stand-alone media converters.

Ideal Central Point

Installed with two standard redundant power supplies and four cooling fans, the EMC1600 offers a more secure and higher capacity housing for your network central point to contain and power up to 16 media converters.

Plug-and-Play

This chassis system is capable of hot-swap installation of the media converters and redundant power supply.

Functionality

There is one cooling fan inside each redundant power supply. Two additional fans are fitted on the inside wall of the chassis to ensure good ventilation.

Features

- ▶ House up to sixteen Media Converters (EM1100/EM2100, EM1000/EM2000, EM1000SLC/EM2000SLC, EM120, EL100/EL200, and EL110/EL210 series)
- ▶ Non-stop operation and minimal downtime
- ▶ Hot-swappable: Media Converters and redundant power supply modules
- ▶ Redundant 100 ~ 240VAC 50 ~ 60Hz Internal Universal PSU or -48VDC Power inputs
- ▶ Power redundancy: The other redundant power supply module is capable of taking over immediately if one of the redundant power supply modules fails
- ▶ Load sharing: Two internal power supply modules provided for load sharing purposes
- ▶ Power isolation: Media Converter bay power isolation ensures each bay is electrically isolated from each other
- ▶ Over current protection: Fuse on PCBA for each Media Converter bay and power supply module
- ▶ 0°C to 45°C (32°F to 113°F) operating temperature range
- ▶ Metal case, standard 19" rack-mount size, two-unit-height
- ▶ Supports Rack Mounting installation

Specifications

Power

Input:

- 100 ~ 240VAC, 50 ~ 60Hz Internal Universal PSU
- -48VDC

Power Consumption:

- 73.2W Max.

Mechanical

Casing:

- Metal case

Dimensions:

- 440mm (W) x 276mm (D) x 90mm (H)
(17.32" (W) x 10.87" (D) x 3.54" (H))
- Standard 19" rack-mount size, two-unit-height

Weight:

- 6.8Kg (14.96lbs.)

Installation:

- Rack Mounting

Environment

Operating Temperature:

- 0°C to 45°C (32°F to 113°F)

Storage Temperature:

- -10°C to 70°C (14°F to 158°F)

Ambient Relative Humidity:

- 10% to 90% (non-condensing)

Interface

LED Indicators:

- Per Unit: Power Status (Power)

Regulatory Approvals:


ISO:

- Manufactured in an ISO9001 facility

Emission Compliance:

- CE Mark Class A, FCC Part 15 Class A

Diagrams

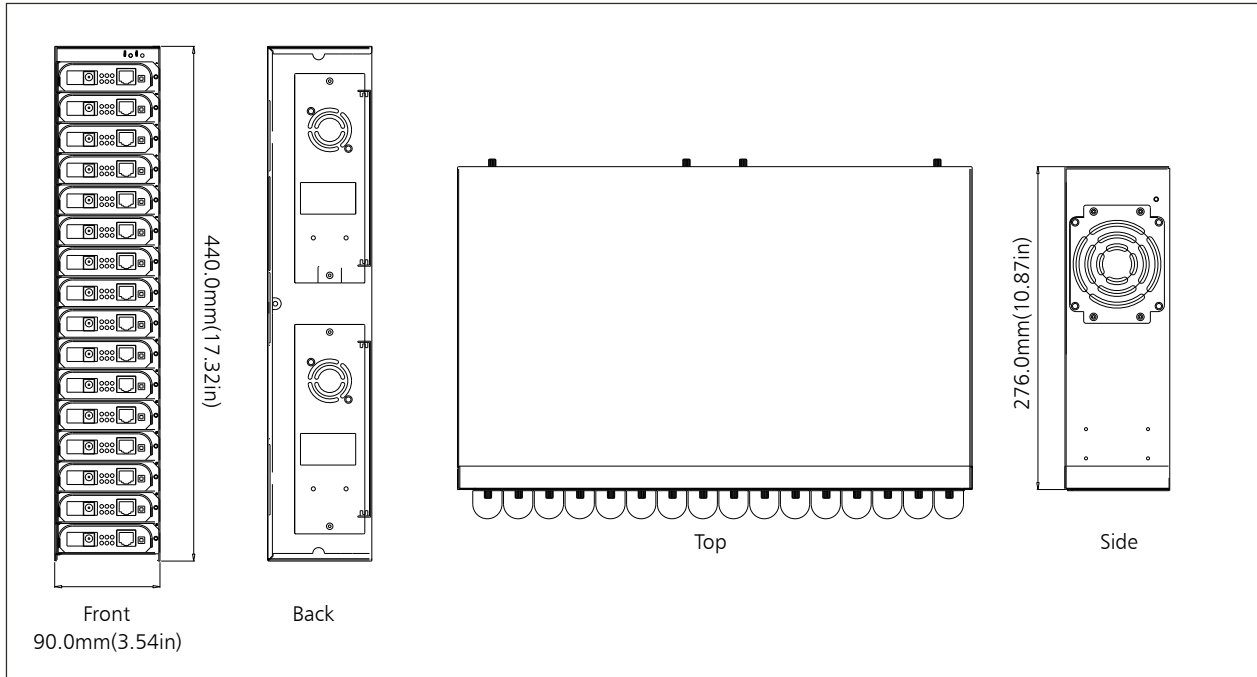

Ethernet
Switches

1

Serial
Servers

2

Media
Converters

3

Others

4

Ordering Information

EMC1600	16-Bay Media Converter Chassis
EMC1600-RPSA	Redundant AC Power Supply (84W) for EMC1600
EMC1600-RPSD	Redundant DC -48V Power Supply for EMC1600