

PD1041

Hardened Surge Protection Device – RJ45



Overview

EtherWAN's PD1041 Hardened Surge Protection Device is designed to protect your EtherWAN Switch investment; however any Ethernet network device can be protected from dangerous electrical surges. Designed for harsh environments, the PD1041 can be placed where you need it to protect your valuable network equipment.

Spotlight

- **Protection Solution Against Voltage Surge**

- Provides pair-to-pair protection through RJ45 connector

- **Flexible Installation**

- Supports DIN-rail or desktop installation

- **Wide Temperature Range**

- Provides -40°C to 75°C operating temperature range for extreme environments

- **Compatible with 10/100BASE-T, Gigabit and PoE products**

- Pass-through Data and PoE Power

Hardware Specifications

Electrical

Maximum continuous operating voltage U_C

- $\leq 3.3V$ DC

Maximum continuous voltage U_C (wire-wire)

- $\leq 3.3V$ DC ($\pm 60V$ DC/PoE+)

Maximum continuous voltage U_C (wire-ground)

- $\leq 180V$ DC

Nominal current I_N

- $\leq 1.5A$ (25 °C)

Operating effective current I_C at U_C

- $\leq 1\mu A$

Residual current I_{PE}

- $\leq 8\mu A$

Nominal discharge surge current I_n (8/20) μs (Core-Core)

- 100 A

Nominal discharge surge current I_n (8/20) μs (Core-Earth)

- 2 kA (per signal pair)

Total surge current (8/20) μs

- 10 kA

Nominal pulse current I_{an} (10/700) μs (Core-Core)

- $\leq 40A$

Nominal pulse current I_{an} (10/700) μs (Core-Earth)

- $\leq 160A$

Output voltage limitation at 1 kV/ μs (Core-Core) spike

- $\leq 85V$ (PoE)

Output voltage limitation at 1 kV/ μs (Core-Earth) spike

- $\leq 700V$

Output voltage limitation at 1 kV/ μs (Core-Core) static

- $\leq 9V$

Output voltage limitation at 1 kV/ μs (Core-Earth) static

- $\leq 700V$

Output voltage limitation at 100V/s (Core-Core)

- $\leq 9V$

Output voltage limitation at 100V/s (Core-Earth)

- $\leq 300V$

Output voltage limitation at 100V/ μs (Core-Core)

- $\leq 9V$

Output voltage limitation at 100V/ μs (Core-Earth)

- $\leq 600V$

Residual voltage at I_N , (conductor-conductor)

- $\leq 15V$
- $\leq 100V$ (PoE)

Voltage protection level U_p (Core-Core)

- $\leq 9V$ (B2 - 1 kV/25 A)
- $\leq 100V$ (B2 - 1 kV/25 A - PoE)
- $\leq 15V$ (500 V/100 A)

Voltage protection level U_p (Core-Earth)

- $\leq 600V$
- $\leq 700V$ (C2 - 4 kV/2 kA)

Response time t_A (Core-Core)

- $\leq 1ns$

Response time t_A (Core-Earth)

- $\leq 100ns$

Input attenuation aE, sym.

- 1 dB ($\leq 250MHz$)

Near-end crosstalk attenuation

- $\leq 35dB$ (At 250 MHz / 100 Ω)

Cut-off frequency f_g (3 dB), sym. in 100 Ohm system

- $> 500MHz$

Capacity (Core-Core)

- typ. 5 pF (f= 1 MHz / VR= 0 V)

Capacity (Core-Earth)

- typ. 2 pF (f= 1 MHz / VR= 0 V)

Surge carrying capacity in acc. with IEC 61643-21 (Core-Core)

- B2 (1 kV/25 A)

Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)

- B2 (4 kV / 100 A)
- C2 (4 kV / 2 kA)
- D1 (1 kA)

Mechanical

Casing

- Aluminum case
- IP30

Dimensions

- 62.5mm (W) x 100mm (H) x 30mm (D)
(2.5"(W) x 3.8"(H) x 1.18"(D))

Weight

- 184g $\pm 5\%$

Installation

- DIN-Rail

Connection

- RJ45 connector

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95%, non-condensation

Regulatory Approvals


ISO

- Manufactured in an ISO9001 facility

UL

- UL497B

Dimensions

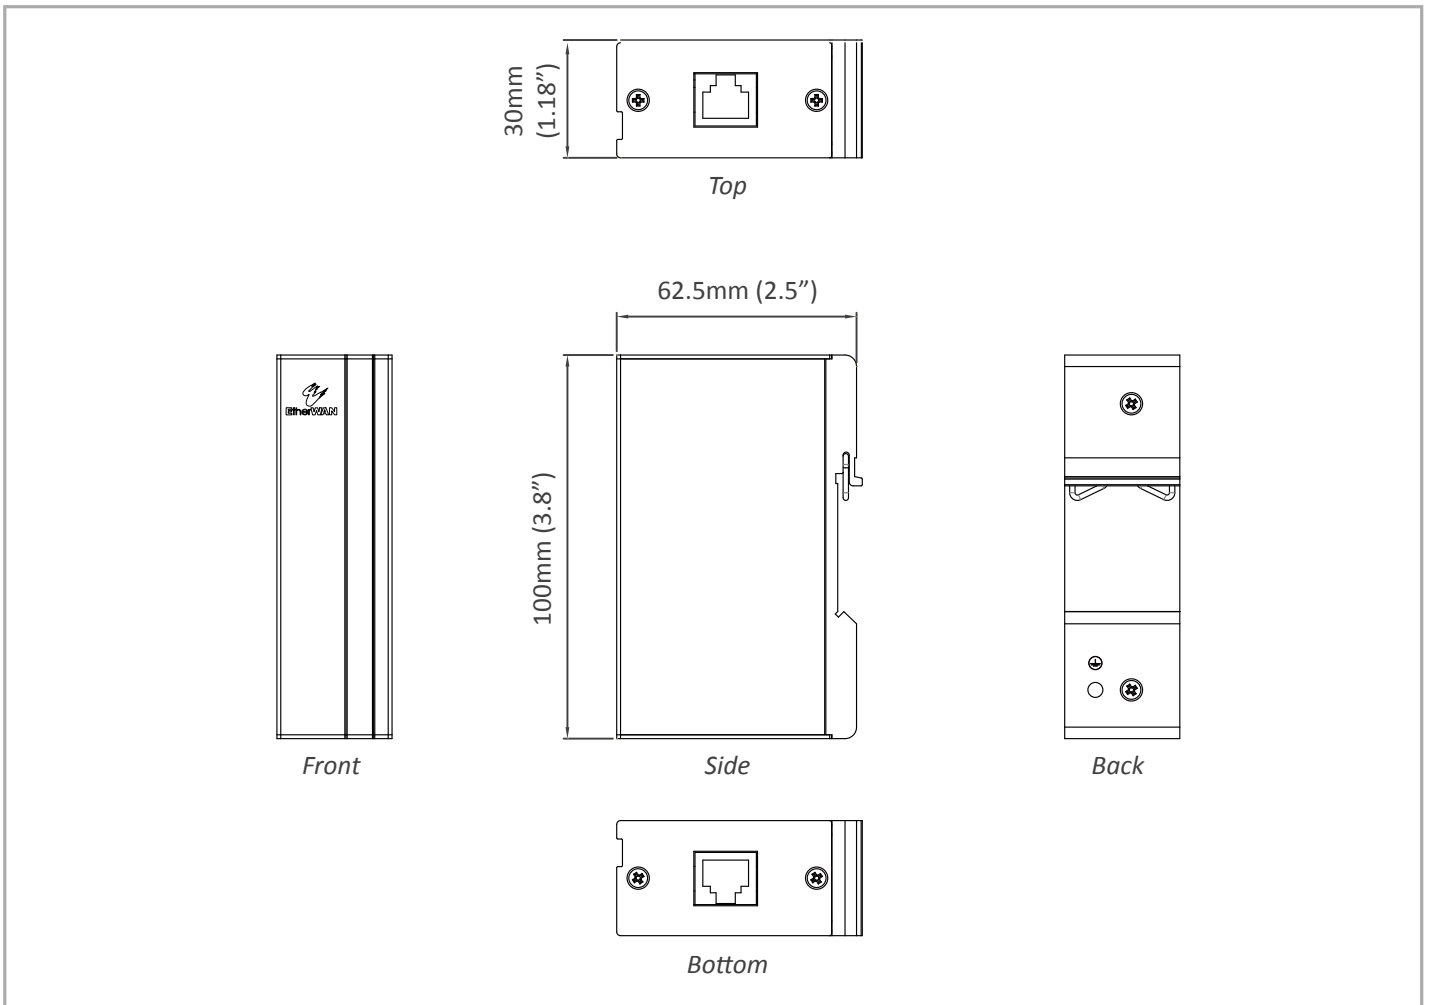

Ordering Information

Model

PD1041

Hardened Surge Protection Device – RJ45

**Note: CAT6 cable is recommended*